

ELECTRIC BOLT

ML230 SERIES

ORDERING INFORMATION

ML230 S L D



EXAMPLE :


- ML230SL – With lock status sensor
- ML230SLD – With lock and door status sensor

SPECIFICATIONS

- Suitable for double swing door
- Ball-bearing type: to prevent the bolt from abnormal dropping out
- Fail-safe: Locked when energized
- Voltage: 12VDC or 24VDC
- Current Draw:
 - Pull-in: 1A/12VDC
 - Holding: 0.3A/12VDC
- With lock and door status sensor
- Built-in voltage spike suppressor
- Face Plate Material: Aluminum


AUTOLOCK TIME DELAY SETTING

- Use jumper to select auto-lock time delay (0, 2.5, 5 secs.)

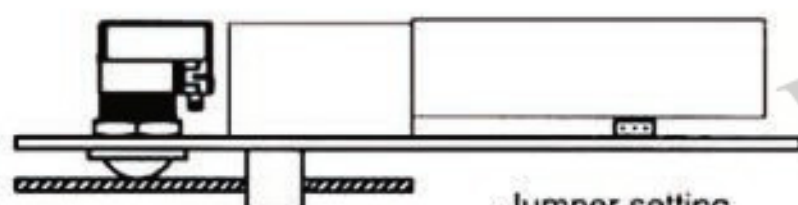



Jumper setting	Time Delay
•••	0 sec
••	2.5 sec
•	5 sec

INSTALLATION POSITIONS



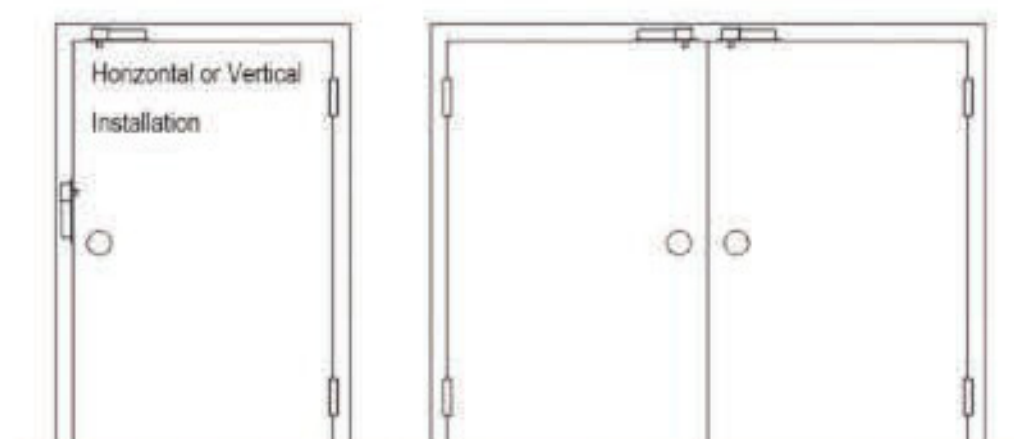


BRACKETS

- Suitable for glass door or surface mount installation

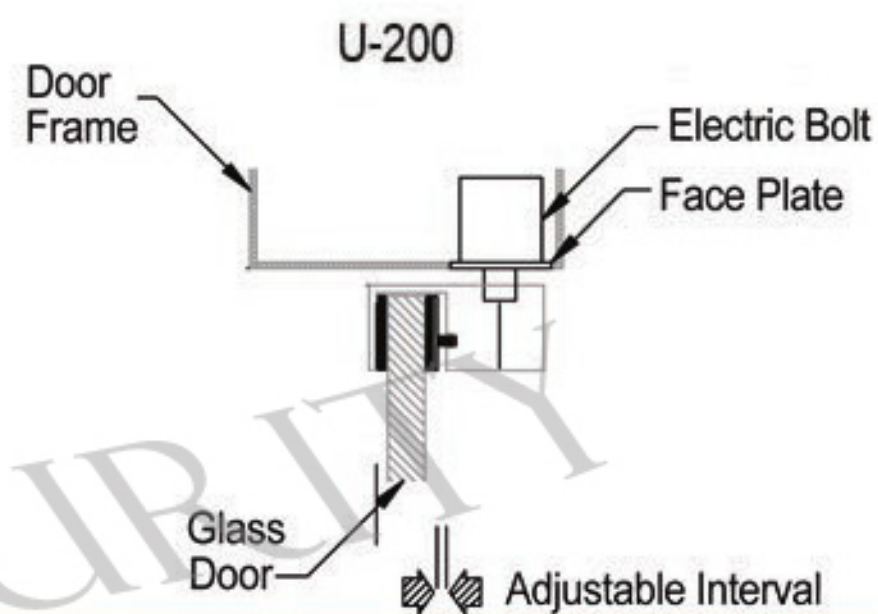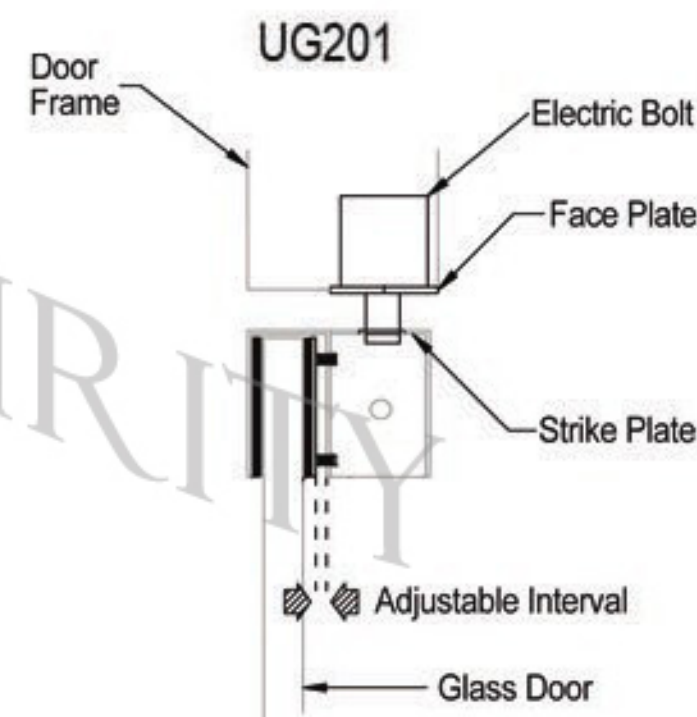

DIMENSIONS

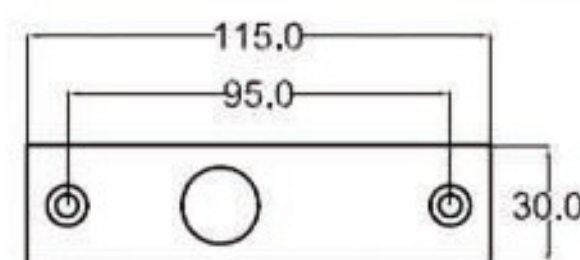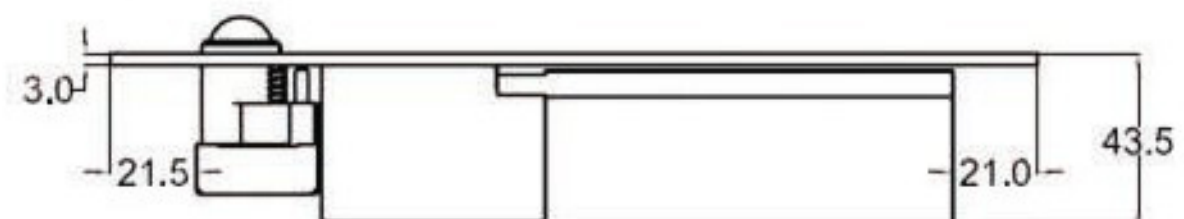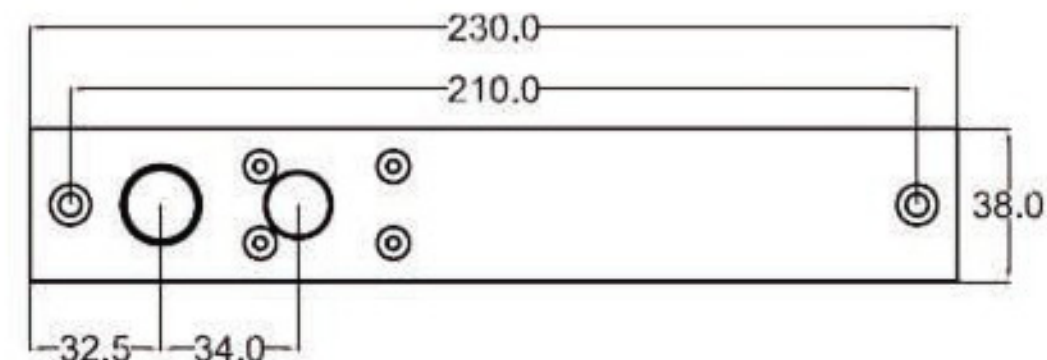

VGSE RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.