



ISO 9002
059-A




ELECTRO-MAGNETIC LOCKS MLSH SERIES

SPECIFICATIONS AND TECHNICAL DETAILS:

- DIMENSIONS: MAGNET(MLSH01)-250L x 42H x 26D
MAGNET(MLSH02)-500L x 42H x 26D
ARMATURE PLATE : 185L x 38W x 12.5T
- SURFACE MOUNT
- CURRENT DRAW : 500mA/12V, 250mA/24V
- DUAL VOLTAGE : 12V / 24V
- OPTIONS : MLSH01-0 : BASIC
MLSH01 : LOCK STATUS SENSOR, LED
MLSH01T : TIMER, LOCK STATUS SENSOR, LED
MLSH01T-DS : TIMER, LOCK STATUS SENSOR
AND DOOR STATUS SENSOR, LED
- HOLDING FORCE : ABOUT 600LBS.
- BUILT-IN VOLTAGE SPIKE SUPPRESSOR
- CE APPROVED
- UL LISTED
- MOUNTING BRACKETS OPTIONS : B0011A,B1011,B1012A,B1003
B1005, U-185, U-160.



MLSH01 SERIES

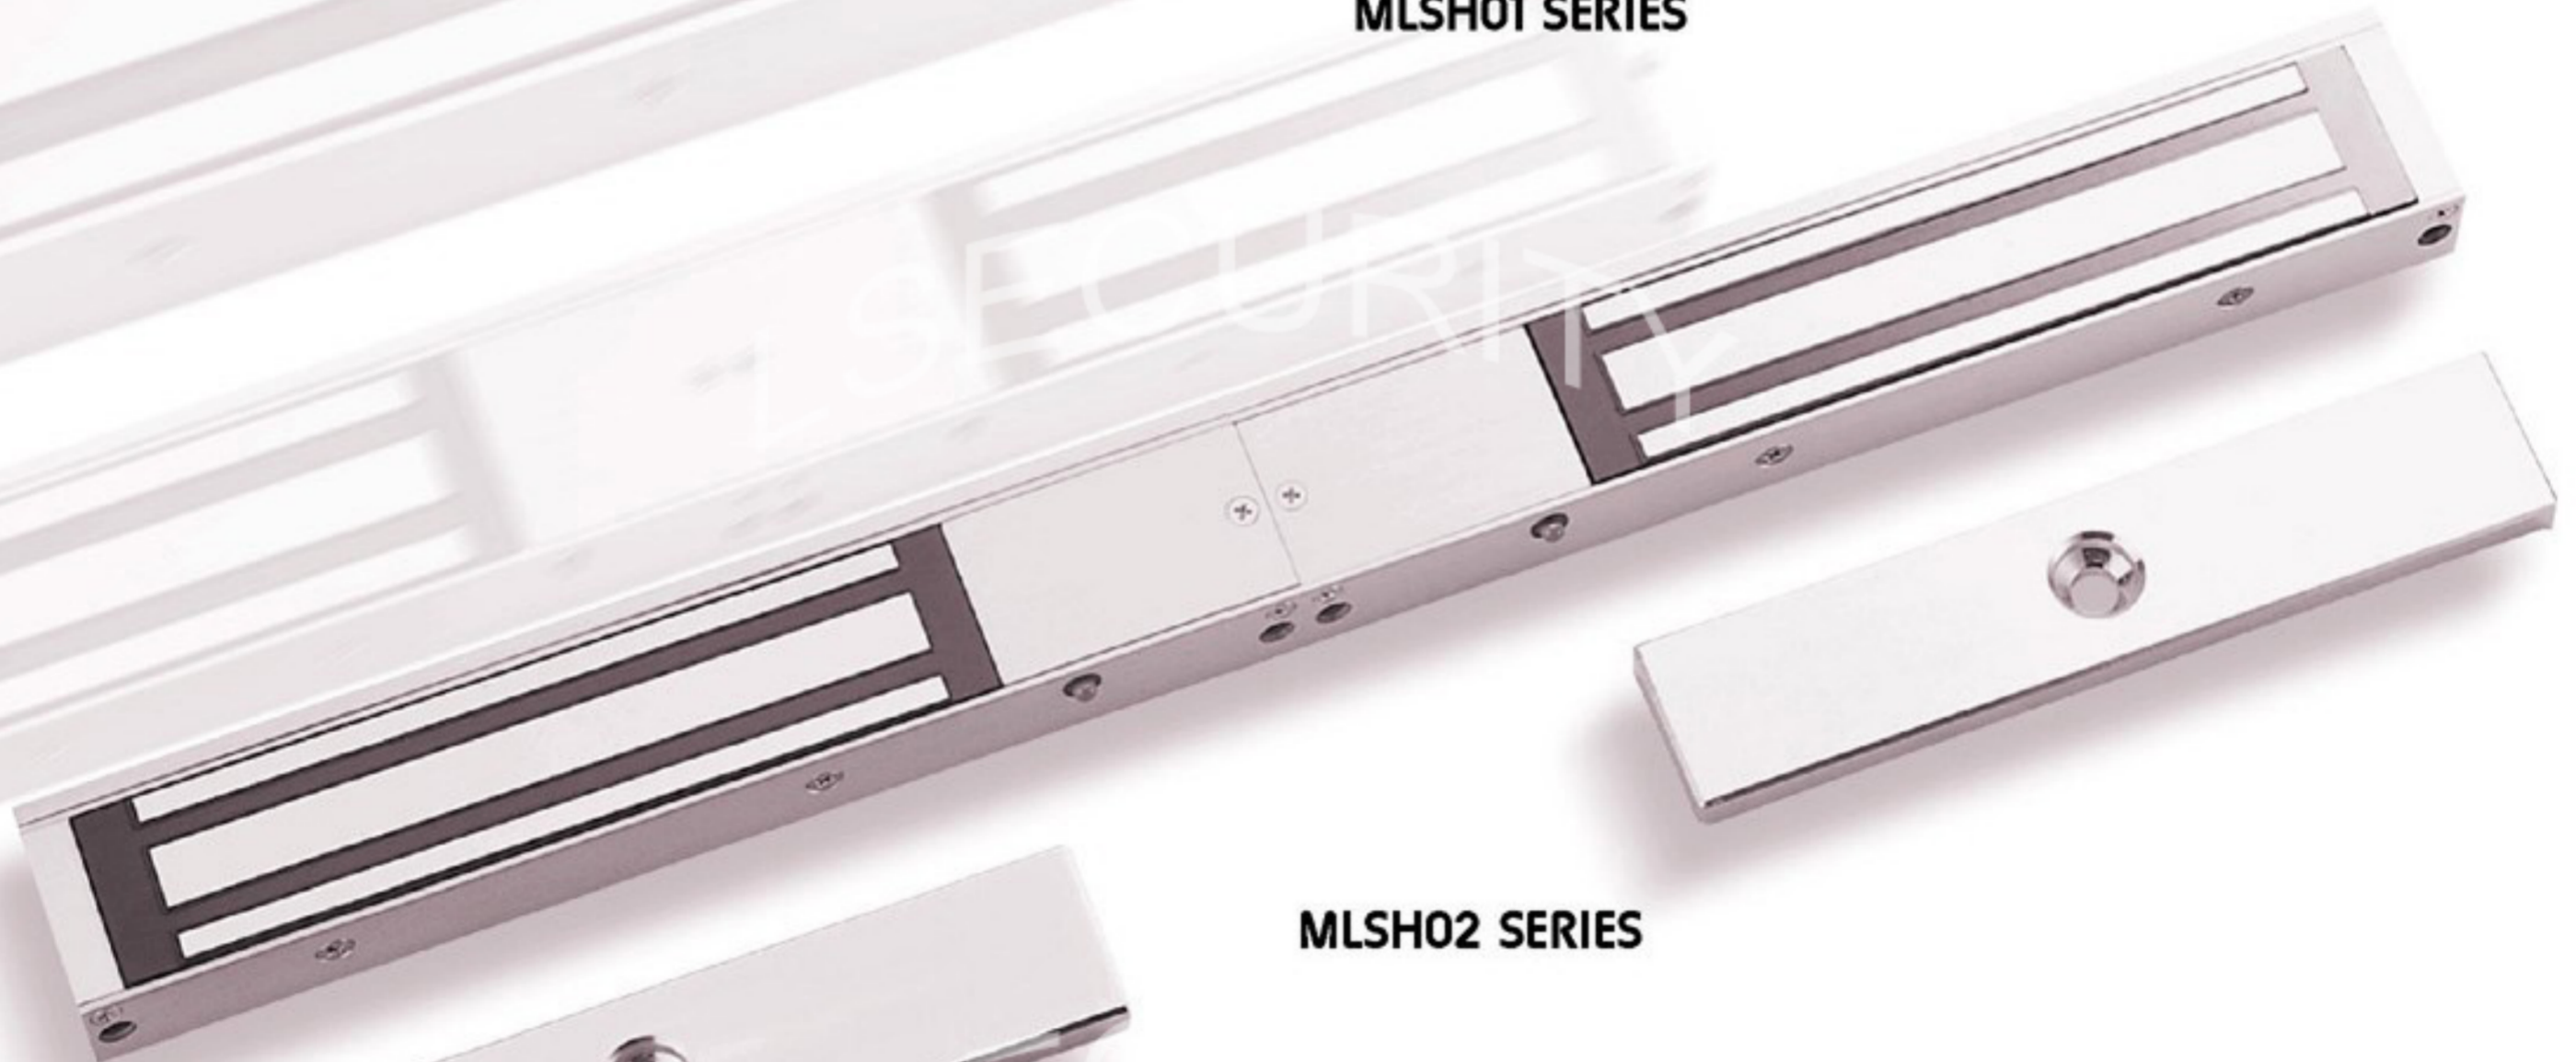

MLSH02 SERIES

VGSE RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

